




This bollard is a simple solution for parking bay protection and similar applications. The bollard is housed in a recessed casing to eliminate any tripping hazard when the bollard is retracted. The hinged lid is fitted with a cam lock to secure the bollard in either the raised or recessed position.

Manufactured from fully welded mild steel, the bollard and casing are galvanised after welding and we are also able to offer a polyurethane paint finish in black or yellow if required.

Installation involves less groundworks than traditional retractable bollards and is ideal where a limited depth of excavation is needed.

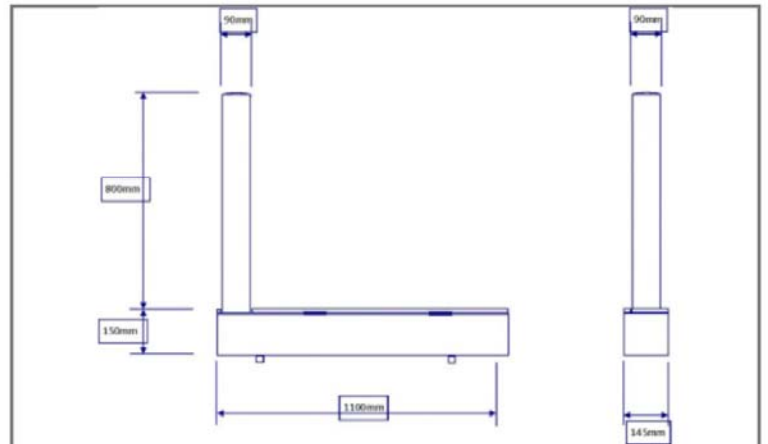

Standard Specification	
Construction	Fully welded mild steel with checker plate hinged lid.
Finish	Galvanised after welding.
Dimensions - Bollard	900mm height x 76mm diameter
Dimensions - Casing	1160mm length x 145mm width x 150mm depth.
Weight	50kg Total
Locking	Cam Lock with 2 keys provided
Optional Items	
Non standard finish	Polyester powder coated in yellow or black.
Reflective Bands	Class 2 retro-reflective band in white, yellow or red
Decorative Sphere	Welded steel sphere to top of bollard

To order please call our sales office on +44 (0) 1273 467642
or email us at sales@apsaegis.co.uk